


CB1565A


Ice Cube

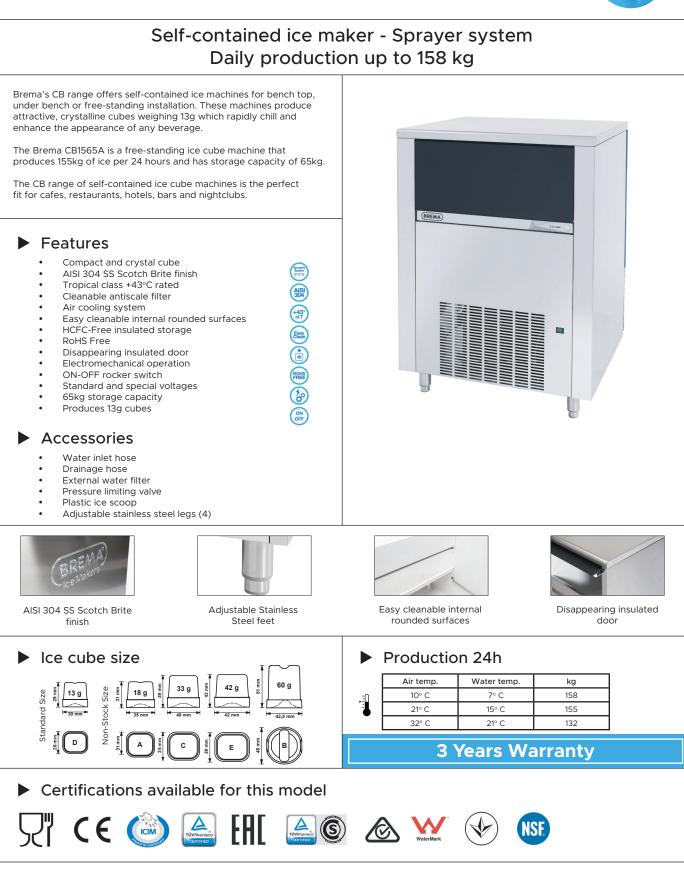

() www.comcater.com.au

(X) contactus@comcater.com.au

comcater

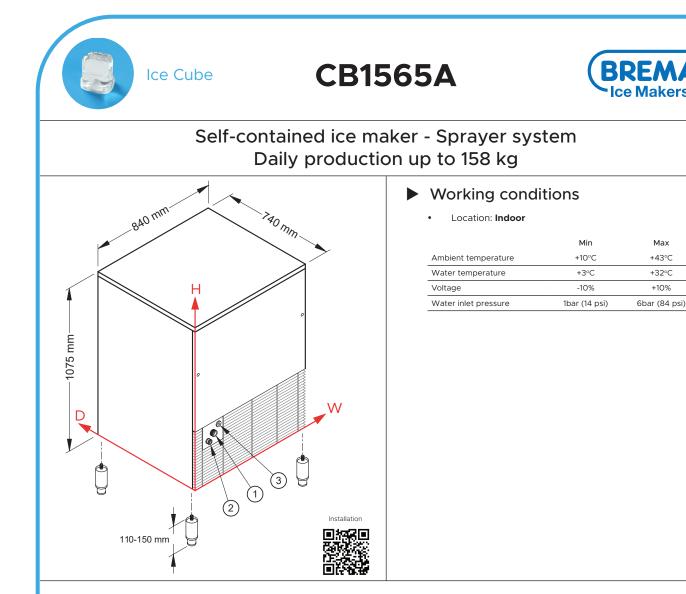

Connections

All measures are referred to the rear bottom-left corner (W-H- \emptyset)

(1) Water in.: 141mm - 290mm - 3/4" (2) Water out.: 79mm - 245mm - 24mm

(3) Electrical connections.: 186mm - 326mm


Technical Information

Production in 24h	155kg
Store capacity, up to	65kg
Cooling system	А
Kind of cube (standard)	D-13g
Kind of cube (non-stock)	A-18g, C-33g, E-42g, B-60g
Refrigerant	R452A
Standard voltage	240V ~ 50 Hz - 15A (lead with plug supplied)
Power consumption*	1400W

AISI 304 stainless steel
100mm sides + back
A: 2.6l/kg
840 - 740 - 1075
880 - 785 - 1245
118kg
138kg

All the technical information need to be considered at the following conditions: Sizes without feet Standard Cube (13 g) Ambient temperature +21°C Water temperature +15°C

*Average power consumption at +43°C (standard voltage)





www.comcater.com.au

Max

+43°C

+32°C

+10%