

Electric, self contained, tilting single kettle, 45 litre capacity, 2/3 steam jacketed. Simple & reliable solid state controls for accurate temperature control ($\pm 1^{\circ}\text{C}$) and low water safety. All exterior surfaces are stainless steel.

STANDARD FEATURES

- Manual tilting, balanced design
- Self-contained, easily installed
- 50 psi steam jacket rating for higher cooking temperatures
- Solid state water level control
- Splash proof element cover with a double gasket seal
- IPX6 Rated water resistant controls, splash-proof construction
- Large pouring lip for high capacity and chunky products.
- Welded-in heating elements
- Steam jacket filled with treated water, venting and/or refilling is not required
- Re-inforced rolled rim design prevents damage to kettle rim, eliminates "bar rim designs"
- Easily cleaned: kettle and all exterior surfaces are of type 304 stainless steel with an #4 finish
- Self locking marine type tilting mechanism prevents accidental spills. Balanced design makes it easy to tilt
- Operating temperature range from 63°C - 127°C
- Rear mounted easy access pressure gauge and pressure relief valve to prevent tampering
- 316 Stainless Steel kettle liner for high acid food products (316-G)

ACCESSORIES

- Stainless Steel Equipment Stand with Drain Drawer 450mm height. (ST-28)
- Optional Splash Guard for equipment stand. (SG28)
- Hot and cold water faucet with swing spout. (DPK19)
- Cooking Baskets (BS12)
- Food Strainers (FS12)
- Measuring Strips (MS12)
- Lift Off Cover (CL12)
- Kettle Markings (KMIL - factory fitted)
- Gear Box Tilting Mechanism (TGB)

TECHNICAL DATA

Power Supply: 3NAC 415V 50Hz, 16.7 amp
(Cable & Plug not included)


Total Output: 12.1kW

Capacities (per kettle):
(in 115 gram servings, other sizes may be calculated)
12 gallons / 45 litres - 352 servings






SHIPPING DATA

Shipping Weight: 80kg
Shipping Dimensions: 711W x 991D x 1371H mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



WATER 
3/8" O.D. copper tube or
1/2" N.P.T. pipe.
When ordered with
optional faucet.

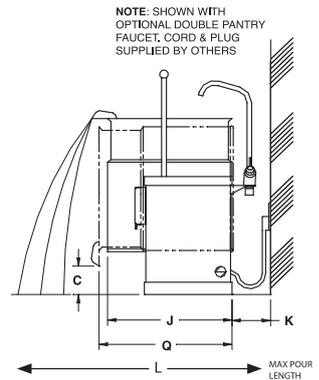

BASE MOUNTING DIAGRAM

CLEARANCE
RIGHT = 0"
LEFT = 0"
REAR = See "K" on chart above.

DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	Q	R
KET-12-T	89mm	508mm	178mm	38mm	488mm	632mm	457mm	864mm	405mm	152mm	965mm	425mm	152mm	457mm	432mm