

Free-standing electric range with electric oven constructed in AISI 304 stainless steel. Electric hob constructed in AISI 304 stainless steel. 2 mm thick pressed top, designed for flush alignment and to accommodate the water column accessory. Recessed top to contain spills. Square 300x300 mm sealed hotplates in cast-iron with 4 kW output. Hotplates equipped with automatic reset safety thermostat which trips in the event the appliance is switched on without a pan. 7-position selector switch for heat adjustment. Indicator led for verifying correct appliance operation.

GN 2/1 conventional electric oven. Oven heated by independently controlled top and bottom heating elements. Thermostat control providing temperature adjustment from 50°C to 300°C. Cooking chamber in stainless steel, dimensions 575x700x300h mm. Oven bottom in cast iron.

Oven inner door in stainless steel with labyrinth seal. 4-position selector switch, safety thermostat. Indicator leds indicating correct oven operation.


Oven power: 6 kW. Appliance equipped with height adjustable feet in stainless steel (850-900 mm). IPX5 protection rating.

STANDARD FEATURES

- 2 mm thick pressed stainless tops
- IPX5 water protection
- Modular design
- Interlocking device supplied with all units
- Space at rear for connections

OPTIONAL FEATURES

- Castor kit

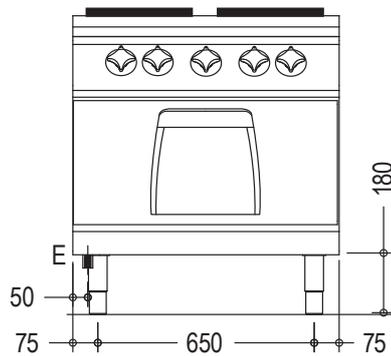

LEGEND

- E = Socket
- S = Draining

DIMENSIONS

900D x 800W x 870H mm
Oven: 535D x 650W x 300H mm

TECHNICAL DATA

Power Supply: 400V 3NAC 50Hz (Lead & Plug not included)
Total Output: 22kW
Hobs: 4 x 4kW
Oven: 6kW

SHIPPING DATA

Net Weight: 192kg
Shipping Weight: 206kg
Shipping Dimensions: 840W x 1020L x 1100H mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

