


Two well electric fryer, constructed in AISI 304 stainless steel. 1.5 mm thick top, designed for back-to-back alignment without flue apertures. Deep drawn cooking wells in AISI 304 stainless steel, with radiused internal corners. 15+15 litre well capacity. Wells with wide front expansion zone for oil and foam and extended cold zone for collection of food particles. Armoured immersion-type heating element in AISI 204 stainless steel. The element can be rotated by over 90° to facilitate well cleaning. Activation of heating is signalled by an orange indicator led which lights up on the control panel. Electronic thermostat, with adjustment from 100° to 185°C. Safety thermostat with manual reset. Removable filter, basket, lid and catchment basin for drain tap supplied. Height adjustable feet in stainless steel (850 – 900 mm).

**STANDARD FEATURES**

- 1.5mm thick pressed stainless steel tops
- Modular design
- Interlocking device supplied with all units
- Removable filter, basket, lid and catchment basin for drain tap supplied

**OPTIONAL FEATURES**

- Castor kit
- Dual baskets

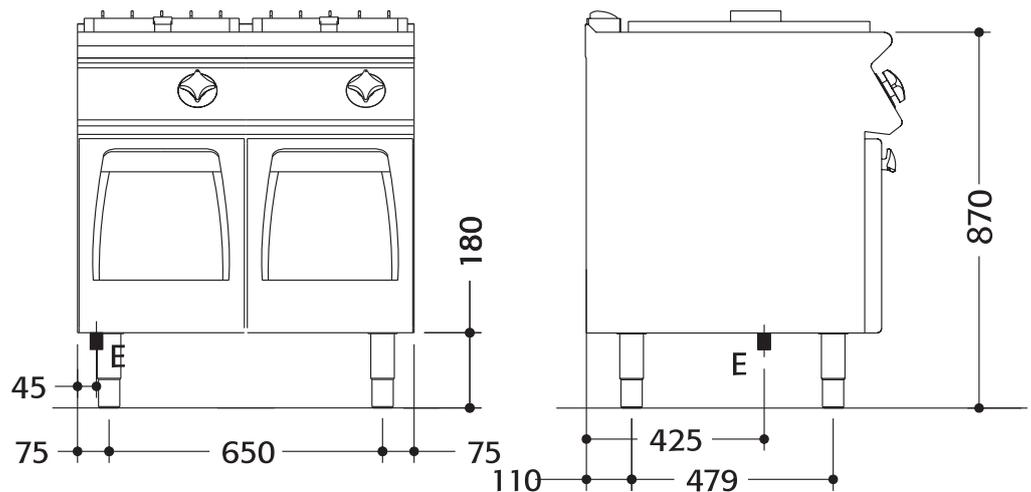

**LEGEND**

E = Socket

**DIMENSIONS**

External: 730D x 800W x 870H mm

**TECHNICAL DATA**

Power Supply: 400V 3NAC 50Hz (Lead & Plug not included)

Total Output: 24kW

**SHIPPING DATA**

Net Weight: 70kg

Shipping Weight: 84kg

Shipping Dimensions: 830W x 840L x 1100H mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

