


Two well gas fryer, constructed in AISI 304 stainless steel. 1.5 mm thick top, designed for back-to-back alignment. Pressed cooking wells in AISI 304 stainless steel, with radiused internal corners. 15+15 litre well capacity. Wells with wide front expansion zone for oil and foam and extended cold zone for collection of food particles. Heating by means of external stainless steel burners with optimized flame distribution. Heat is adjusted by means of the thermostatic safety valve with thermocouple. Main burner ignition by means of pilot burner. Piezoelectric ignition with waterproof cap on control panel. Temperature of oil in well controlled by mechanical thermostat, with adjustment from 100 to 185 °C. Safety thermostat with manual reset. Removable filter, basket, lid and catchment basin for drain tap supplied. Height adjustable feet in stainless steel (850 - 900 mm).

STANDARD FEATURES

- 1.5mm thick pressed stainless steel tops
- Modular design
- Interlocking device supplied with all units
- Flame failure and standing pilot light
- Natural to Propane gas conversion kit
- External gas regulator supplied (specify gas type)
- Removable filter, basket, lid and catchment basin for drain tap supplied

OPTIONAL FEATURES

- Castor kit
- Flexible gas hose with quick disconnect
- Dual baskets

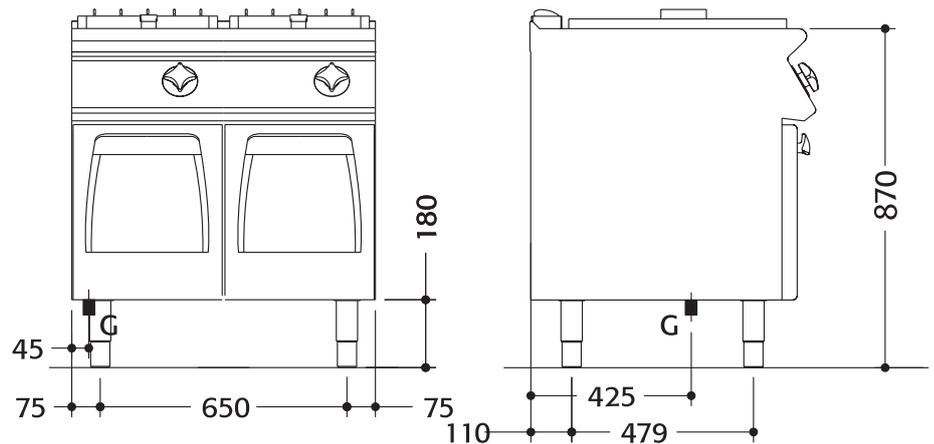

LEGEND

G = Gas

DIMENSIONS

External: 730D x 800W x 870H mm

TECHNICAL DATA

Gas Type: Natural or Propane

Total Output (Gas): Natural Gas - 106MJ/h Propane Gas - 102MJ/h

Gas Connection: 1/2"

AGA approval number: 7411

SHIPPING DATA

Net Weight: 88kg

Shipping Weight: 102kg

Shipping Dimensions: 830W x 840L x 1100H mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

