

Electric bain marie top constructed in AISI 304 stainless steel. 2 mm thick stainless steel top without flue apertures, designed for insertion of water column accessory.


Well in AISI 304 stainless steel with radiused internal corners to facilitate cleaning. Sloping well bottom for optimum drainage of water. Measurements N. 2 x GN 1/1+1/3. Designed to accommodate 15mm deep containers. Armoured heating elements in Incoloy underneath the well. Water temperature thermostatically controlled, with adjustment from 30°C to 90°C. Safety thermostat trips in the event of activation of heating without water in the well, manual reset. Activation of heating signalled by an orange indicator led on the control panel. Appliance equipped with vertical overflow drain. IPX5 protection rating.

STANDARD FEATURES

- 2 mm thick pressed stainless tops
- IPX5 water protection
- Modular design
- Interlocking device supplied with all units
- Appliance equipped with vertical overflow drain

OPTIONAL FEATURES

- Cabinet base and doors
- Hygienic cabinet base with pressed runners
- Refrigerated base
- 50mm stainless steel frame for worktop installed on refrigerated base or countertop

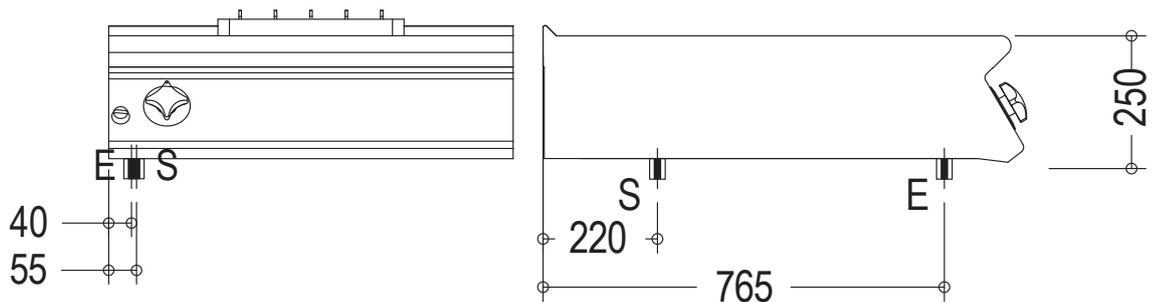

LEGEND

- S = Draining - 1/2"
- E = Socket

DIMENSIONS

900D x 800W x 250H mm
Tank Dimensions: 678 x 748 x 170H mm

TECHNICAL DATA

Power Supply: 400V 3NAC 50Hz (Lead & Plug not included)
Total Output: 5.4kW

SHIPPING DATA

Net Weight: 40kg
Shipping Weight: 50kg
Shipping Dimensions: 980W x 840L x 550H mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

