

Free-standing range with gas hob constructed entirely from AISI 304 stainless steel. 2 mm pressed top, designed for flush alignment and to accommodate the water column accessory.

Appliance comprises 6 sealed burners. Safety tap with thermocouple for continuous output control. Main burner ignition by means of permanent, low-energy pilot burner. Pilot burner and thermocouple are located underneath the main burner body, protected from accidental impact and any spills. Hob features radiused corners for ease of cleaning and pan supports in RAAF enamelled cast-iron (acid, alkali and flame resistant).

GN 2/1 gas oven with thermostatic control valve providing temperature adjustment from 50°C to 300°C. Burner with stabilized flame complete with pilot flame, safety thermocouple and piezoelectric ignition.

Cooking chamber in stainless steel, dimensions 575x700x300h mm. Oven bottom in cast iron. Oven inner door in stainless steel with labyrinth seal. Appliance equipped with height adjustable feet in stainless steel (850-900 mm). 40 mm neutral cabinet with hinged door. IPX5 protection rating.

## STANDARD FEATURES

- 2 mm thick pressed stainless tops
- IPX5 water protection
- Modular design
- Interlocking device supplied with all units
- Space at rear for connections
- Flame failure and standing pilot light
- Natural to Propane gas conversion kit
- External gas regulator supplied (specify gas type)

### **OPTIONAL FEATURES**

- Castor kit
- Flexible gas hose with quick disconnect

#### **DIMENSIONS**

900D x 1200W x 870H mm

Weight: 178kg

Oven: 575 x 700 x 300H mm

### **TECHNICAL DATA**

Gas Type: Natural or Propane

Total Output (Gas): Natural Gas - 192.9MJ/h Propane Gas - 186.2MJ/h

Gas Connection: 1/2"

AGA approval number: AGA 7410G

#### **SHIPPING DATA**

1040D x 1240W x 1180H mm


Shipping Weight: 198kg

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

# ANC9FG12G52

STAR 90 SERIES 1200MM WIDE 6-BURNER GAS RANGE WITH GAS OVEN AND NEUTRAL CABINET



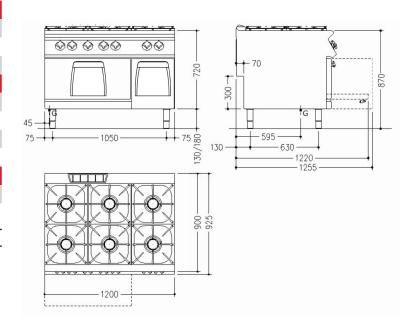

## **LEGEND**

G = Gas - 1/3



**National Head Office** 156 Swann Drive

**Derrimut VIC 3030** +61 3 8369 4600 Tel: Fax: +61 3 8369 4699

Melbourne 96-100 Tope Street South Melbourne VIC 3205 +61 3 8369 4600 Tel: +61 3 8699 1299 Fax:

Sydney 20/4 Avenue of the Americas

Newington, NSW 2127 Tel: +61 2 9748 3000 Fax: +61 2 9648 4762

Brisbane

1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311

Perth

Unit 16, 7 Abrams Street Balcatta, WA 6021 Tel: +61 8 6217 0700 Fax: +61 8 6217 0799